
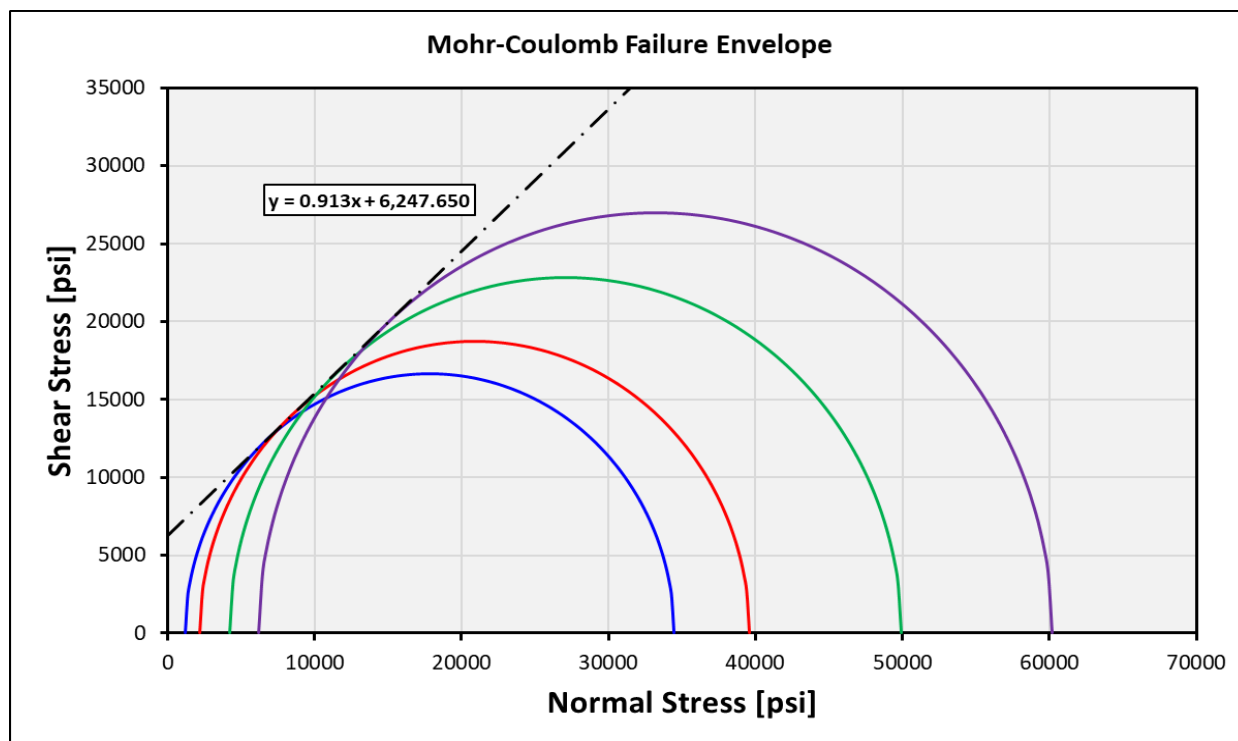


Company: Alberta Geological Survey, Alberta Energy Regulator
Well: Multiple Wells
Field: #N/A
Location: Onshore, Canada

Date: 31-Mar-2025
File: 202500182
Saturated Fluid: As-Received

Result of Triaxial Compressive Strength Test

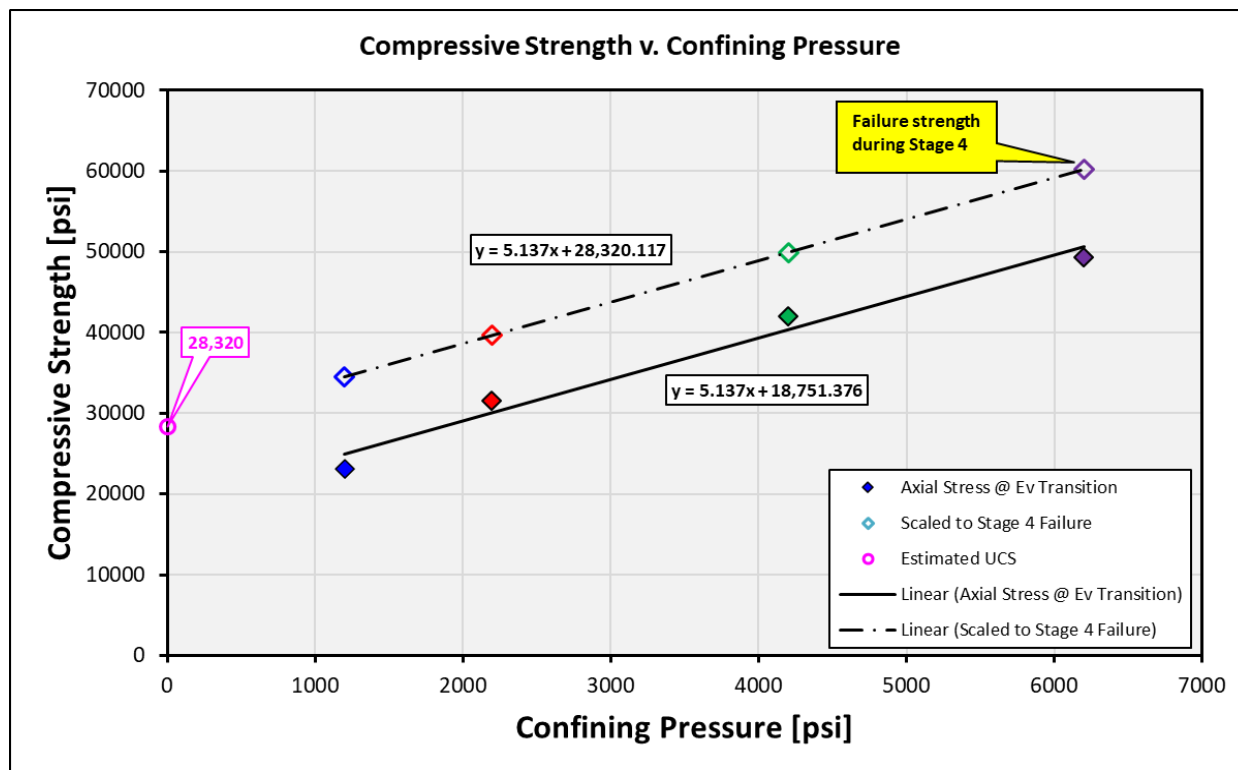

Company: Alberta Geological Survey, Alberta Energy Regulator
 Well: Multiple Wells
 Field: #N/A
 Location: Onshore, Canada

Date: 31-Mar-2025
 File: 202500182
 Saturated Fluid: As-Received

Result of Triaxial Compressive Strength Test

Sample # (stage)	Depth (m)	Confining Pressure $P_c = \sigma_3$ (psi)	Differential Stress $\sigma_1 - \sigma_3$ (psi)	Compressive Strength σ_1 (psi)	Slope $\sigma_1 v. P_c$	Estimated UCS (psi)	Internal Friction Angle (deg.)	Internal Coefficient of Friction	Cohesive Strength (psi)
24BA062 (Stage 1)	1361.3	1200	33284	34484					
24BA062 (Stage 2)	1361.3	2200	37421	39621					
24BA062 (Stage 3)	1361.3	4200	45695	49895	5.137	28320	42.4	0.913	6248
24BA062 (Stage 4)	1361.3	6200	53969	60169					

Note: Stages 1-3 are unloaded at the point where the volumetric strain transitions from compression to dilation, noting the differential stress at which this transition occurs. During Stage 4 we also note the differential stress at which this transition occurs, but then continue on to the ultimate failure of the sample. We then determine the approximate failure strength during Stages 1-3 by scaling the volumetric strain transition stress up to the ultimate failure strength that is determined during Stage 4.