
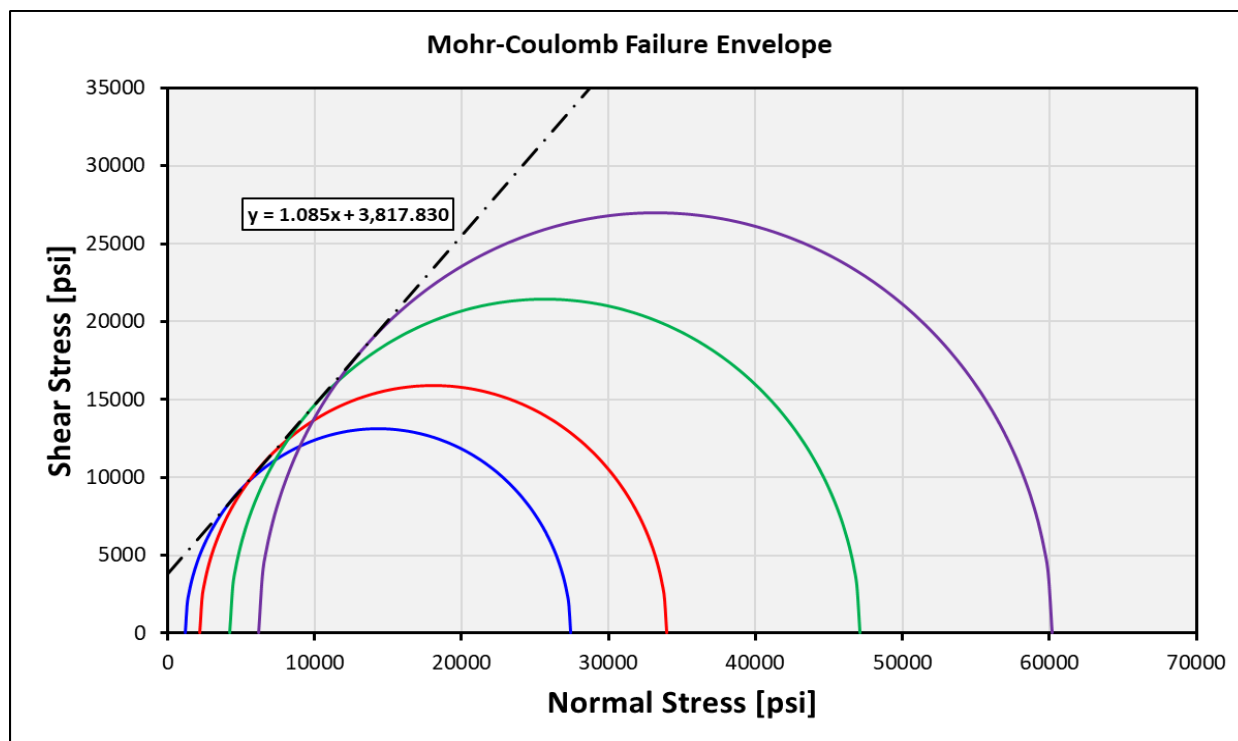


Company: Alberta Geological Survey, Alberta Energy Regulator
Well: Multiple Wells
Field: #N/A
Location: Onshore, Canada

Date: 31-Mar-2025
File: 202500182
Saturated Fluid: As-Received

Result of Triaxial Compressive Strength Test

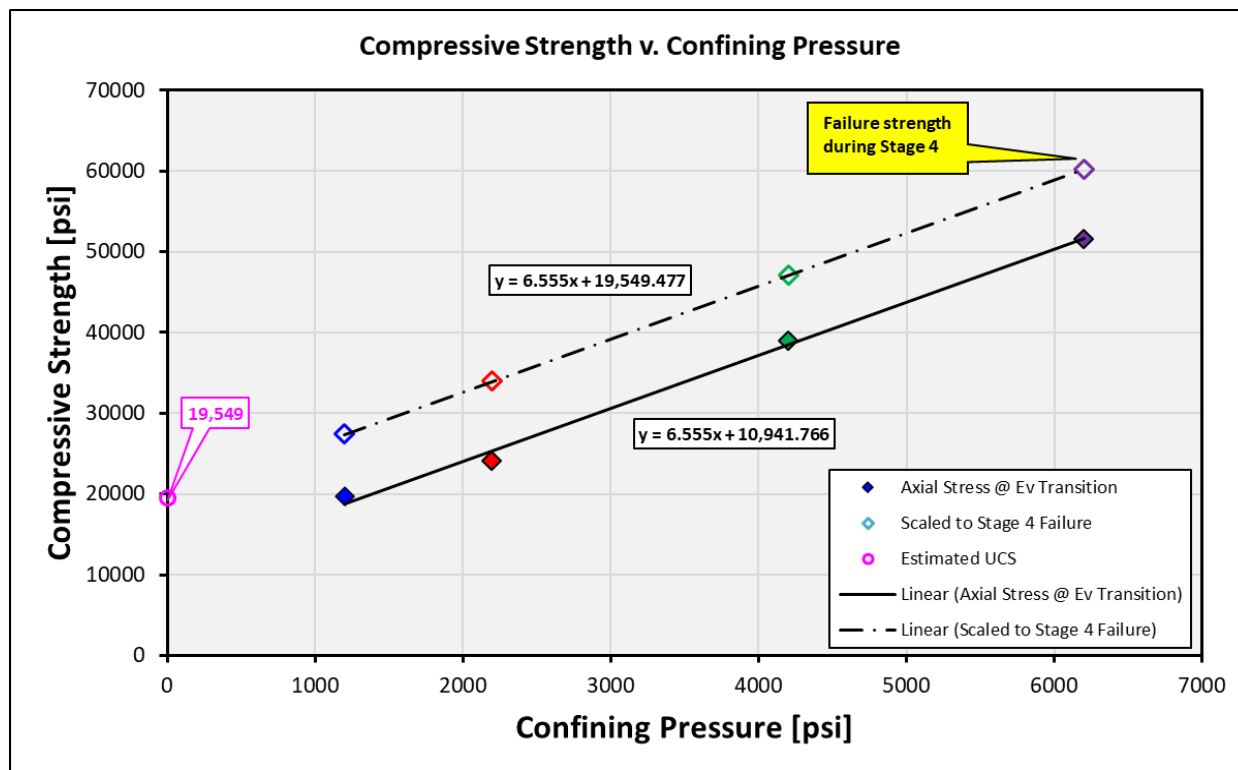

Company: Alberta Geological Survey, Alberta Energy Regulator
 Well: Multiple Wells
 Field: #N/A
 Location: Onshore, Canada

Date: 31-Mar-2025
 File: 202500182
 Saturated Fluid: As-Received

Result of Triaxial Compressive Strength Test

Sample # (stage)	Depth (m)	Confining Pressure $P_c = \sigma_3$ (psi)	Differential Stress $\sigma_1 - \sigma_3$ (psi)	Compressive Strength σ_1 (psi)	Slope $\sigma_1 v. P_c$	Estimated UCS (psi)	Internal Friction Angle (deg.)	Internal Coefficient of Friction	Cohesive Strength (psi)
18 (Stage 1)	2101.17	1200	26216	27416	6.555	19549	47.3	1.085	3818
18 (Stage 2)	2101.17	2200	31771	33971					
18 (Stage 3)	2101.17	4200	42881	47081					
18 (Stage 4)	2101.17	6200	53991	60191					

Note: Stages 1-3 are unloaded at the point where the volumetric strain transitions from compression to dilation, noting the differential stress at which this transition occurs. During Stage 4 we also note the differential stress at which this transition occurs, but then continue on to the ultimate failure of the sample. We then determine the approximate failure strength during Stages 1-3 by scaling the volumetric strain transition stress up to the ultimate failure strength that is determined during Stage 4.