

GENERAL COMMENTS

DEPOSIT CHARACTERISTICS

Deposit Number	Material Description	Reserves (1000 m <sup>3</sup> )		Additional Comments	Texture (%)			Wear	Overburden Thickness (m)	Deposit Thickness (m)	Deposit Area (ha)	Deposit Genesis	Additional Comments
		Gravel	Sand		Gravel	Sand	Fines						
1	Sandy gravel	477	358	Gravel fine and coarse; sand medium and coarse graded.	62.7	36.4	0.9	-	1.2	4.3	36	Valley train	Deposit continues on NTS 821/4.
2	Gravelly sand	3750	3375	Gravel fine and coarse; sand fine grained, clean and moderately clean.	~50	~45	~5	-	0	Up to 18.6	80	Kame	
3	Sandy gravel	140	50	Gravel coarse; sand fine grained, clean and moderately clean.	~70	~25	~5	-	0	1.2 to 2.7 Avg. 1.8	2.8	Kame	
4	Sandy gravel	6540	3470	Gravel coarse and fine; sand fine to coarse grained, clean.	66.4	34.7	0.9	-	0 to 1	6 to 17 Avg. 9	240	Kame	
5	-	-	-	Assumed on basis of surface mapping or airphoto interpretation.	-	-	-	-	-	-	-	Kame	

**Deposit Number** — Granular deposits shown on this map may have commercial possibilities. This assumption followed from two criteria used in the mapping process: study of the area considered only granular deposits greater than one metre thick, and covering an area more than one hectare; and it only considered deposits where the mineral aggregate thickness was greater than the overburden thickness. Although the scale of mapping did not permit investigation of all small deposits, many small deposits containing existing pits are indicated.

**Material Description** — Sand and gravel has a variety of applications, such as concrete for construction, asphalt concrete, subbase and base course aggregate for roads, gravel and sand for road surfaces, and pit run for fill. Gradation, rock hardness, and binding characteristics, are some of the specific qualities that are considered in aggregate towards determining its end use. This map indicates these, and other, geological qualities of the sand and gravel within each deposit, but does not indicate their potential uses. The terms used in the table are defined in the figure below.

**Reserves** — The method of calculating in cubic metres the aggregate reserves of deposits took four basic steps: First, the area, in hectares, of each deposit was determined using aerial photographs; Second, geological interpretation, sometimes supported by subsurface information, was assumed in determining the geometry of each deposit, to estimate an overall, average deposit thickness in metres; Third, geological study and limited sample analyses determined the texture (gradation) of sediments in the deposit, and an overall average percentage of gravel and sand; Finally, the volume was calculated as follows: reserve gravel (m<sup>3</sup>) = area (ha) × thickness (m) × 10,000 × % gravel; the same formula was used for sand.


**Texture** — The texture of the sediment refers to the percentage of particles of various sizes. For mineral aggregate, the most important fractions are the gravel and sand. The actual dimensions of the clasts and particles in these fractions are given in the figure. The values given for a particular deposit were determined from a field estimate, or from laboratory analysis, of one or more samples from that deposit. Where more than one sample is taken the tabulated number is the mean value.

**Wear** — The resistance of gravel-size clasts to wear or abrasion can be measured in a laboratory test (ASTM-C131, Los Angeles Abrasion Testing). The amount of material that breaks down into smaller sizes is measured and related to the original sample weight in terms of percent wear. The higher the percentage wear the more susceptible the gravel is to breakdown under stress. Gravel with a percentage wear of less than 40 is considered very resistant.

**Overburden Thickness** — The thickness of non-economic material, or overburden, covering a deposit, sometimes is a limiting factor in the exploitation of an aggregate deposit. The tabulated values given are approximate overburden thicknesses as determined from geological investigations and subsurface testing.


**Deposit Area** — Deposits in this study were delineated by interpretation of aerial photographs and the contacts should be considered approximate. Information is precise only where test holes, or geological sections, are indicated.

**Deposit Genesis** — The genesis, or formation, of deposits is vital to the understanding of the gradational nature, extent and geometry of the deposit. This understanding forms the basis for extrapolation from a limited number of known points (test holes, pits, sections) and permits an overall assessment of the deposit.

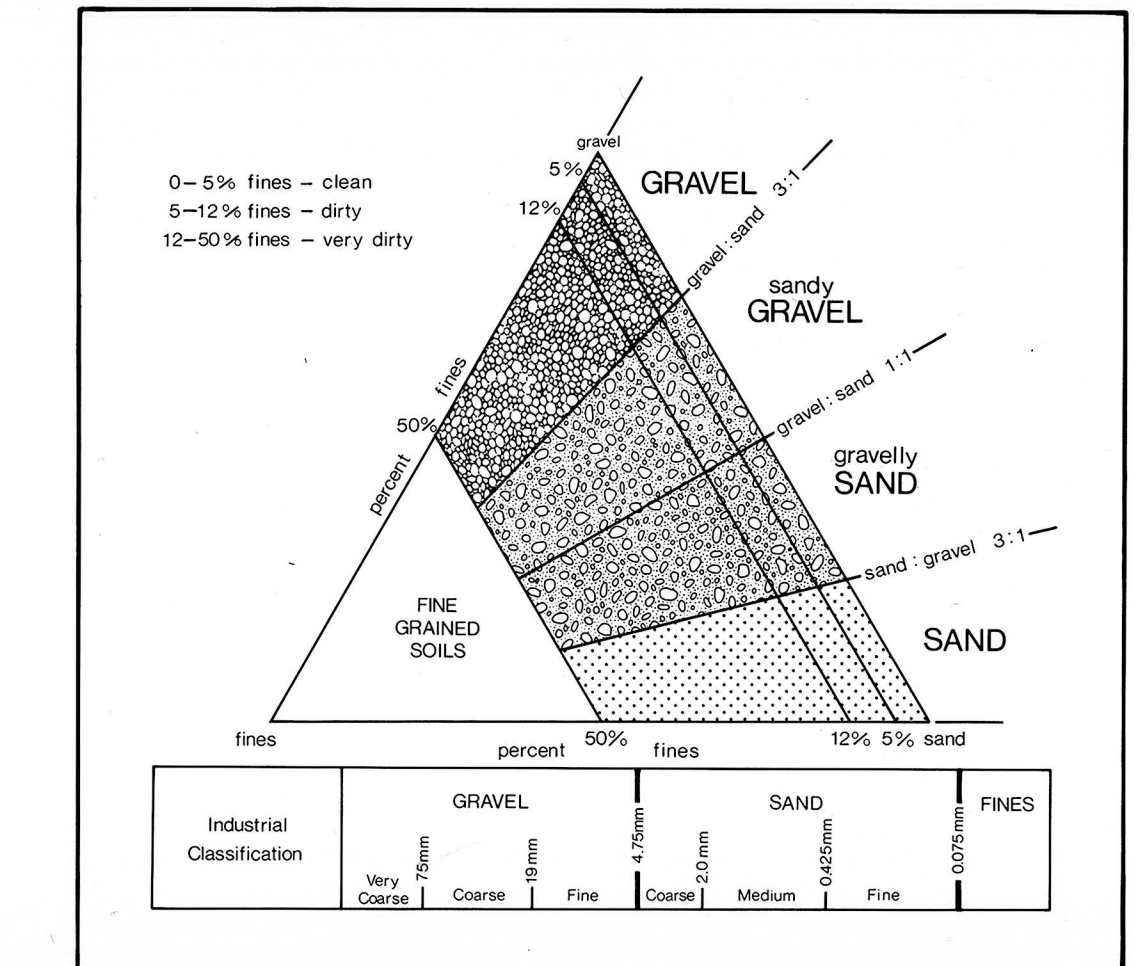

Map Legend

- 3 Deposit number
- Assumed boundary
- Active or inactive pit
- Alberta Geological Survey test hole
- Sand or gravel exposure
- Buried sand or Gravel deposit

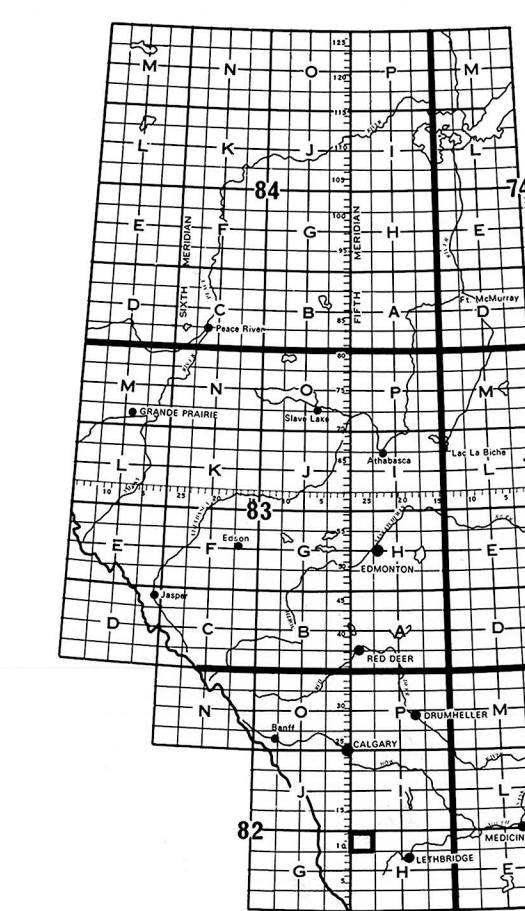

Produced by the SURVEY AND MAPPING BRANCH, DEPARTMENT OF ENERGY, MINES AND TECHNICAL SURVEYS, ALBERTA. This map is a photogrammetric map of the area shown on the map sheet 82H/13, Edition 3, 1975. It is a derivative of the map sheet 82H/13, Edition 3, 1975. It is a derivative of the map sheet 82H/13, Edition 3, 1975. It is a derivative of the map sheet 82H/13, Edition 3, 1975.

**GRANUM**  
WILLOW CREEK MUNICIPAL DISTRICT  
ALBERTA  
WEST OF FOURTH MERIDIAN - OUEST DU QUATRIEME MERIDIEN  
Scale 1:50,000 Echelle

© Canada 1975, tous droits réservés.

This is a sand and gravel resource map prepared by the Alberta Geological Survey as part of a series at a scale of 1:50,000. The series represents an ongoing aggregate inventory of Alberta which provides data for general land-use planning, land management or aggregate exploration. Please note that the delineation of deposits and calculation of reserves are approximations only. Alberta Energy and Natural Resources provides financial support for the Aggregate Inventory.

REFERENCES:  
Geology and compilation by I. Shetsen; revised from Earth Sciences Report 81-4.

**AGGREGATE RESOURCES**  
**GRANUM 82H/13**



Alberta Geological Survey